




DE-AWNER DD-184

GENERAL

Brand	Cimbria
Designation	De-awner
Model	DD-184
Use	Industry
Application	Conditioning of cereal grains and other seeds intended for seed.

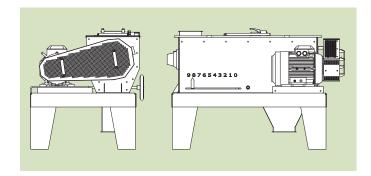

PERFORMANCE

	Bulk density t/m³	Moisture content %	Capacity t/h
MOTOR 7.5 KW			
Barley	0.68	15–18 (13–15)	30 (5)
Wheat	0.76	15–18 (13–15)	30 (5)
MOTOR 11 KW			
Barley	0.68	15–18 (13–15)	40 (12)
Wheat	0.76	15–18 (13–15)	40 (12)
MOTOR 15 KW			
Barley	0.68	15–18 (13–15)	50 (15)
Wheat	0.76	15–18 (13–15)	50 (15)
MOTOR 18.5 KW			
Barley	0.68	15–18 (13–15)	60 (18)
Wheat	0.76	15–18 (13–15)	60 (18)
MOTOR 22 KW			
Barley	0.68	15–18 (13–15)	65 (22)
Wheat	0.76	15–18 (13–15)	65 (22)

Key: Values in parenthesis are for de-bearding. Other values are for general conditioning.

Note: Capacities may vary for different impurity and moisture contents.

DIMENSIONS

Beater arm diameter	ø361 mm (36 beaters)
Overall length	1 608 mm
Overall height	1 082 mm
Overall width	1 090 mm

Note: Dimensions include the stand-alone support frame.

WEIGHT

Weight, empty	545 kg
Weight, operating (wheat)	730 kg
Weight, choked (wheat)	745 kg
Note: Weights include the stand alone sur	apart frama Cupport framas for DELTA

Note: Weights include the stand-alone support frame. Support frames for $\overline{\text{DELTA}}$ cleaners may add additional weight.

OPERATING SPEED

Beater arm snatt	850 rpm @ 60 Hz

ELECTRICAL RATINGS

Motor	7.5 kW; 11 kW; 15 kW;
	18.5 kW: or 22 kW

NOISE

Sound pressure level, empty	79.2 dB(A)
-----------------------------	------------

COMPLIANCE

EU machinery directive	Yes	
EU ATEX directive	No	
EU food contact regulation	Option*	

^{*} Consult your Cimbria dealer for full details.

ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -10°C to +40°C
Altitude	Up to 1 000 m

SURFACE PROTECTION

Casing	Paint (corrosivity category C2; low durability)

LIFETIME

Intended life limit	20 years

Copyright © The right to alterations is reserved.