


Data Sheet 517.2


IMS MULTI AXIS SCANNER



The CIMBRIA IMS MULTI AXIS SCANNER is specially designed to profile very big grain silo bins and storage bunkers. The unit can operate as a single unit on the IMS software platform or as a group within big storage bunkers where coverage can be overlaid to prevent "blind spots". Profile scans can be done on a timed schedule or with the Dynamic Profiler in the IMS software. The Dynamic Profiler compares certain points on the profile against previous movements and manages the profile scans accordingly. All information is recorded into the IMS software where accurate volume is calculated and tonnages are reported.

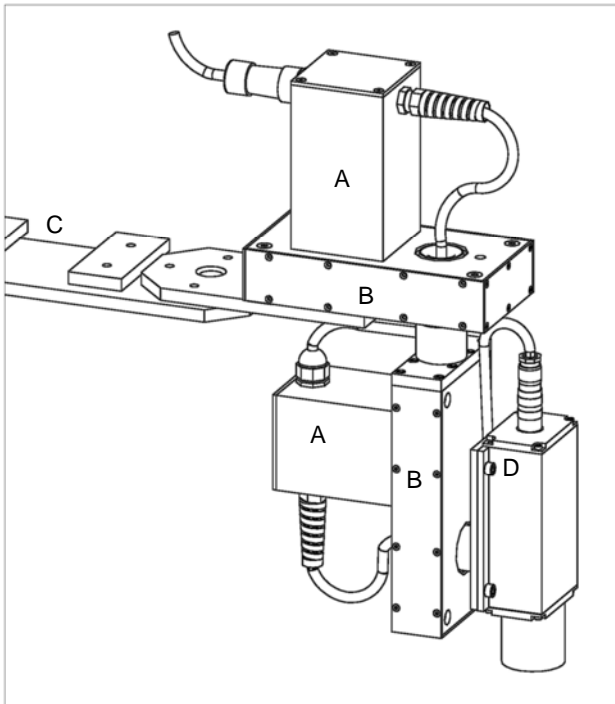

- A) Motor Housing
- B) Gear Housing
- C) Mounting Bar
- D) Scanning Laser
- E) Power and Data Conduit

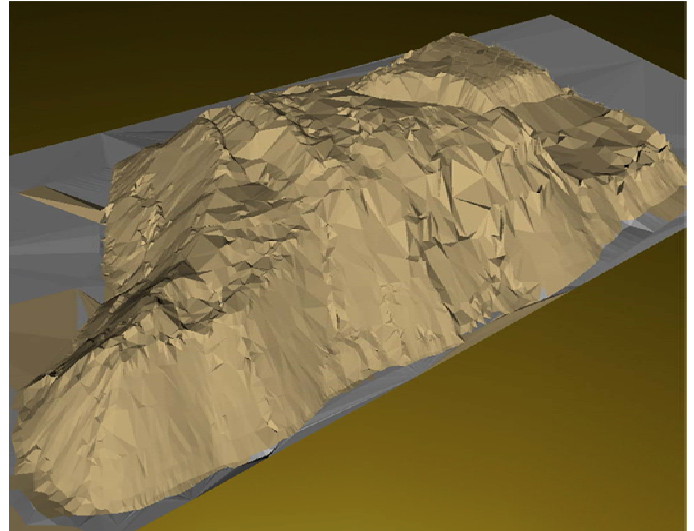

IMS Software RENDER

LASER

TYPE:	650nm laser diode (Red)
CLASS:	Class 2 Conforming to IEC825-1 /EN60825, Class 2 (FDA21 CFR)
OUTPUT POWER:	< 1mW
DIVERGENCE:	0.6 mrad
MAX RANGE:	50M (>100 M with reflective target)
MIN RANGE:	200 mm
RESOLUTION:	1 mm
SUPPLY VOLTAGE:	1VDC to 30VDC (Reverse polarity protected)
POWER USAGE:	<1.5W
DATA INTERFACE:	RS232 -9600,8,N,1 (ASCII)
OPERATING TEMP:	-10°C to +60°C
WEIGHT:	850 g
PROTECTION:	IP65

SCANNER

TILT DEFLECTION:	162°
ROTATIONAL RES:	50, 000PPR
CONNECTOR:	Circular type (IP68)
SUPPLY VOLTAGE:	+24VDC ±10%
POWER USAGE:	<85VA
DATA INTERFACE:	RS232 - 9600,8,N,1
OPERATIONAL TEMP:	0°C to +40°C
WEIGHT:	6.5 kg NETT
PROTECTION:	equ to IP65

Copyright © - The right to alterations is reserved