


GRADER DELTA 128

GENERAL

Brand	Cimbria
Designation	Flat-screen grader
Model	DELTA 128
Use	Industry
Application	Size grading of cereal grains, pulses, oilseeds, and similar seeds intended for seed.

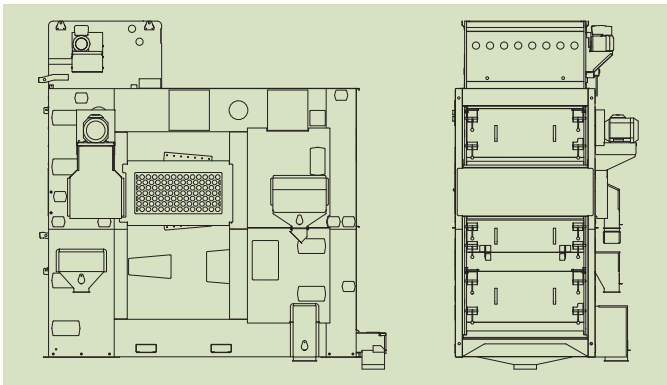

PERFORMANCE

	Bulk density t/m ³	Moisture content %	Capacity t/h
Barley	0.68	14	15
Coffee, green	0.65	14	6–12
Maize	0.71	14	8–12
Oats	0.51	14	10
Peas, common	0.7	14	8–12
Rice, white	0.75	14	8–12
Rye	0.69	14	15
Ryegrass	0.3	14	4
Sorghum	0.64	14	15
Soybeans	0.72	14	8–12
Sunflower	0.4	9	2.5–4
Wheat	0.76	14	15

Note: Capacities are for grading three to four fractions. Capacities may vary for different number of grades.

DIMENSIONS

Screen area, total	24 m ²
Screen size	1 250×800mm (24 pcs)
Overall length	3 705 mm
Overall height	3 586 mm
Overall width	1 981 mm

WEIGHT

Weight, empty	4 030 kg
Weight, operating (wheat)	4 450 kg
Weight, choked (wheat)	9 530 kg

OPERATING SPEED

Shaker feeder (shaft)	140–700 rpm
Screens (shaft), fixed speed	280–285 rpm
Screens (shaft), variable speed	260–320 rpm

ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	3 kW

AIR SUPPLY AND EXTRACTION

Aspiration volume	1 000–2 500 m ³ /h
-------------------	-------------------------------

DYNAMIC LOADS

Horizontal load "Ph"	±3 661 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±2 787 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±2 689 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

NOISE

Sound pressure level, empty	81.6 dB(A)
Sound power level, empty	96.1 dB(A)

COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

* Consult your Cimbria dealer for full details.

ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

LIFETIME

Intended life limit	20 years
---------------------	----------