




CLEANER DELTA 142.2

GENERAL

| Brand | Cimbria |
|-------------|--|
| Designation | Air-screen cleaner |
| Model | DELTA 142.2 |
| Use | Industry |
| Application | Pre cleaning or industrial cleaning of cereal grains, pulses, and oilseeds intended for seed |

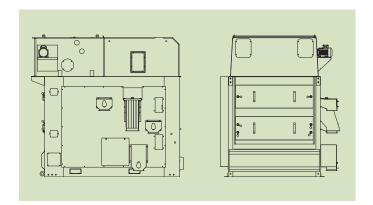

PERFORMANCE

| Barley 0.68 20 (15) 30 (20) Coffee, green 0.65 20 (15) 12–18 (14) Maize 0.71 20 (15) 24 (12) Malt 0.52 20 (15) 15 (15) Oats 0.51 20 (15) 18 (3) Peas, common 0.7 20 (15) 24 (8–17) Rapeseed 0.74 20 (7–9) 25 (12) Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) Soybeans 0.72 20 (15) 24 (8–17) | | Bulk density t/m³ | Moisture content % | Capacity t/h |
|--|---------------|----------------------|--------------------|-----------------|
| Maize 0.71 20 (15) 24 (12) Malt 0.52 20 (15) 15 (15) Oats 0.51 20 (15) 18 (3) Peas, common 0.7 20 (15) 24 (8–17) Rapeseed 0.74 20 (7–9) 25 (12) Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Barley | 0.68 | 20 (15) | 30 (20) |
| Malt 0.52 20 (15) 15 (15) Oats 0.51 20 (15) 18 (3) Peas, common 0.7 20 (15) 24 (8–17) Rapeseed 0.74 20 (7–9) 25 (12) Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Coffee, green | 0.65 | 20 (15) | 12-18 (14) |
| Oats 0.51 20 (15) 18 (3) Peas, common 0.7 20 (15) 24 (8–17) Rapeseed 0.74 20 (7–9) 25 (12) Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Maize | 0.71 | 20 (15) | 24 (12) |
| Peas, common 0.7 20 (15) 24 (8–17) Rapeseed 0.74 20 (7–9) 25 (12) Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Malt | 0.52 | 20 (15) | 15 (15) |
| Rapeseed 0.74 20 (7-9) 25 (12) Rice, paddy 0.51 20 (15) 12-18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Oats | 0.51 | 20 (15) | 18 (3) |
| Rice, paddy 0.51 20 (15) 12–18 (4) Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Peas, common | 0.7 | 20 (15) | 24 (8–17) |
| Rice, white 0.75 20 (15) 24 Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Rapeseed | 0.74 | 20 (7–9) | 25 (12) |
| Rye 0.69 20 (15) 30 (20) Sorghum 0.64 20 (15) 30 (20) | Rice, paddy | 0.51 | 20 (15) | 12-18 (4) |
| Sorghum 0.64 20 (15) 30 (20) | Rice, white | 0.75 | 20 (15) | 24 |
| | Rye | 0.69 | 20 (15) | 30 (20) |
| Soybeans 0.72 20 (15) 24 (8–17) | Sorghum | 0.64 | 20 (15) | 30 (20) |
| | Soybeans | 0.72 | 20 (15) | 24 (8–17) |
| Sunflower 0.4 14 (7–9) 12 (10) | Sunflower | 0.4 | 14 (7–9) | 12 (10) |
| Wheat 0.76 20/15 (15) 30/35 (20) | Wheat | 0.76 | 20/15 (15) | 30/35 (20) |

Legend: Values in parentheses are for industrial cleaning. Other values are for pre

cleaning.

Note: Capacities may vary for different impurity and moisture contents.

DIMENSIONS

| Screen area, total | 7 m ² |
|--------------------|----------------------|
| Screen size | 1 250×800 mm (7 pcs) |
| Overall length | 2 449 mm |
| Overall height | 2 271 mm |
| Overall width | 1 925 mm |

WEIGHT

| Weight, empty | 1 610 kg | |
|---------------------------|----------|--|
| Weight, operating (wheat) | 1 860 kg | |
| Weight, choked (wheat) | 3 160 kg | |
| | | |

OPERATING SPEED

| OI LIVATING STEED | | |
|-----------------------|-------------|--|
| Shaker feeder (shaft) | 140–700 rpm | |
| Screens (shaft) | 300 rpm | |

ELECTRICAL RATINGS

| Motor, shaker feeder | 0.75 kW |
|----------------------|---------|
| Motor, screens | 1.5 kW |

AIR SUPPLY AND EXTRACTION

| Aspiration volume | 6 400 m ³ /h |
|-------------------|-------------------------|

DYNAMIC LOADS

| Horizontal load "Ph" | ±2 621 N @ 4.6-4.8 Hz |
|----------------------------------|-----------------------|
| Vertical load "Pv1" (inlet end) | ±3 171 N @ 4.6–4.8 Hz |
| Vertical load "Pv2" (outlet end) | ±1 657 N @ 4.6-4.8 Hz |

Note: Dynamic loads are for normal operation.

Sound pressure level, empty

NOISE

| COMPLIANCE | |
|-----------------------------|---------|
| EU machinery legislation | Yes |
| EU ATEX legislation | Option* |
| EU food contact legislation | Option* |

73.4 dB(A)

ENVIRONMENTAL CONDITIONS

| Environment | Indoors |
|-------------|---------------------|
| Temperature | From -20°C to +40°C |
| Altitude | Up to 800 m |

SURFACE PROTECTION

| Frame and enclosure | Paint (corrosivity category C2; low durability) |
|---------------------|---|
| | |

LIFETIME

| Intended life limit | 20 years | |
|---------------------|----------|--|

Copyright © The right to alterations is reserved.

Page 1/1 | 2020-05-28

^{*} Consult your Cimbria dealer for full details.