


# COMBI CLEANER DELTA 157.1

The Delta Combi cleaner series is developed for high-capacity pre-cleaning of grain, peas, and rapeseed, and industrial grain cleaning for milling and malting barley.

Combi cleaners are constructed with large screen areas and highly efficient recirculating pre-suction and after-suction system as well as an HMI control system.

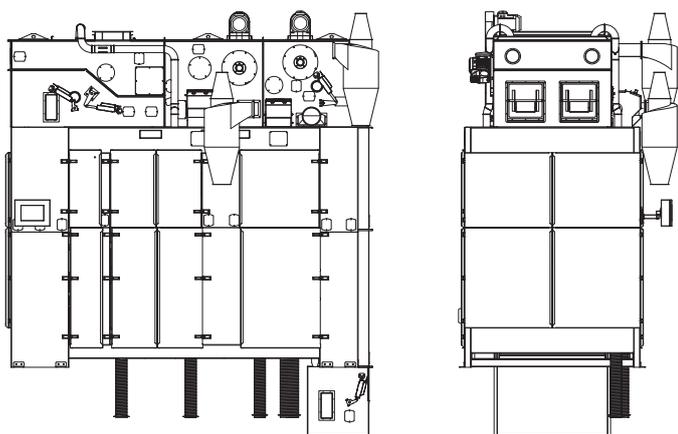

## PERFORMANCE

Materials	Bulk density t/m <sup>3</sup>	Moisture content %	Capacity t/h
Barley	0.68	20 (15)	120 (80)
Maize	0.71	20 (15)	100 (75)
Malt	0.52	20 (15)	50 (50)
Oats	0.51	20 (15)	80 (20)
Peas, common	0.7	20 (15)	100 (50-100)
Rapeseed	0.74	20 (7-9)	100 (40)
Rice, white	0.75	20 (15)	100 (25)
Rye	0.69	20 (15)	120 (80)
Sorghum	0.64	20 (15)	120 (80)
Soybeans	0.72	20 (15)	100 (50-100)
Wheat	0.76	20/15 (15)	120/150 (80)

Legend: Values in parentheses are for industrial cleaning. Other values are for pre cleaning.

Note: Capacities may vary for different impurity and moisture contents.

## SCREENS

Screen angle	8°
Screen area, total	12 m <sup>2</sup>
Screen size	1 250×800 mm (12 pcs)

## DIMENSIONS

Overall length	4 218 mm
Overall height	4 853 mm
Overall width	2 508 mm

## WEIGHT

Weight, empty	6 770 kg
Weight, operating (wheat)	7 200 kg
Weight, choked (wheat)	12 200 kg

## OPERATING SPEED

Shaker feeder (shaft)	140–720 rpm
Screens (shaft)	280–285 rpm

## ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	2.2 kW
Motor, pre aspiration	3 kW
Motor, post aspiration	4 kW

## AIR SUPPLY AND EXTRACTION

Aspiration volume	3 600 m <sup>3</sup> /h
-------------------	-------------------------

## DYNAMIC LOADS

Horizontal load "Ph"	±470 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±1 830 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±1 830 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

## NOISE

Sound pressure level, empty	77.6 dB(A)
-----------------------------	------------

## COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	No
EU food contact legislation	Option*

\* Consult your Cimbria dealer for full details.

## ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

## SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

## LIFETIME

Intended life limit	20 years
---------------------	----------