


PRE-CLEANER DELTA 132.3

The Delta 132.3 grass seed pre-cleaner is specially designed for pre-cleaning of grass seeds and similar types of seeds with a relatively large content of waste products. The grass seed pre-cleaner include shaker feeder or band conveyor, thresher or after-suction system.

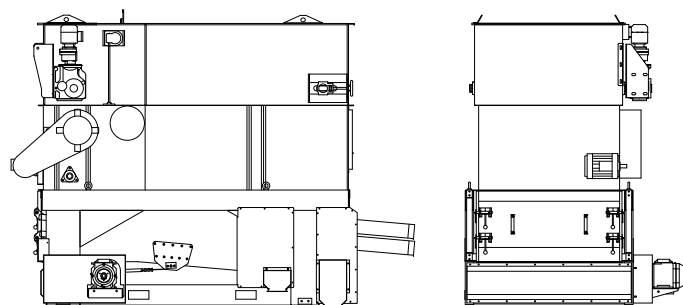

PERFORMANCE

Materials	Bulk density t/m ³	Moisture content %	Capacity t/h
Alfalfa	0.75	12	6
Bluegrass	0.2	12	2
Clover	0.75	12	6
Rapeseed	0.74	9	6
Red fescue	0.3	12	3,5
Ryegrass	0.35	12	5
Timothy	0.4	12	2,5

Note: Capacities may vary for different impurity and moisture contents.

DIMENSIONS

Screen area, total	9 m ²
Screen size	1 250×800 mm (9 pcs)
Overall length	3 598 mm
Overall height	3 142 mm
Overall width	1 994 mm

WEIGHT

Weight, empty	2 080 kg
Weight, operating (ryegrass)	2 500 kg
Weight, choked (ryegrass)	4 360 kg

OPERATING SPEED

Belt feeder (shaft)	1.1–5.6 rpm
Thresher (shaft)	520 rpm
Screens (shaft)	300 rpm

ELECTRICAL RATINGS

Motor, belt feeder	0.37 kW
Motor, thresher	3 kW
Motor, screens	2.2 kW

AIR SUPPLY AND EXTRACTION

Aspiration volume	2 000 m ³ /h
-------------------	-------------------------

DYNAMIC LOADS

Horizontal load "Ph"	±3 008 N @ 4.6–4.8 Hz
Vertical load "Pv1" (inlet end)	±3 286 N @ 4.6–4.8 Hz
Vertical load "Pv2" (outlet end)	±1 156 N @ 4.6–4.8 Hz

Note: Dynamic loads are for normal operation.

NOISE

Sound pressure level, empty	73.4 dB(A)
-----------------------------	------------

COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

** Consult your Cimbria dealer for full details.*

ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	-------------------------------------------------

LIFETIME

Intended life limit	20 years
---------------------	----------