


# SCALPERATOR ROTOCLEAN CP-149.15



## GENERAL

Brand	Cimbria
Designation	Scalperator
Model	ROTOCLEAN CP-149.15
Use	Industry
Application	Scalping of cereal grains, pulses, oilseeds etc.

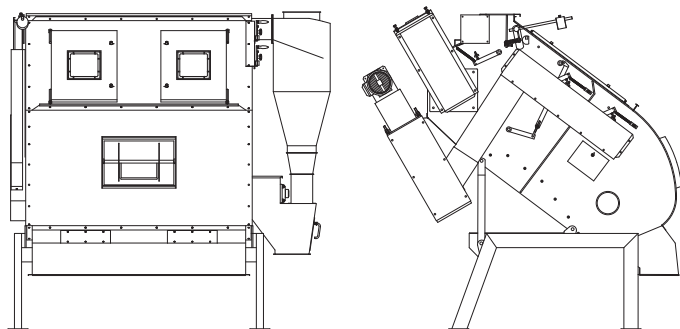

## ELECTRICAL RATINGS

Motor, wheels	1.5 kW
Motor, fan	3 kW

## AIR SUPPLY AND EXTRACTION

Aspiration volume	800 m <sup>3</sup> /h
-------------------	-----------------------

## NOISE

Sound pressure level, empty	97 dB(A)
-----------------------------	----------

## COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	No
EU food contact legislation	No

## ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -15°C to +40°C
Altitude	Up to 1 000 m

## SURFACE PROTECTION

Casing	Paint (corrosivity category C2; low durability)
--------	---

## LIFETIME

Intended life limit	20 years
---------------------	----------

## PERFORMANCE

Materials	Bulk density t/m <sup>3</sup>	Moisture content %	Capacity t/h
Barley	0.68	20	75
Maize	0.71	20	60
Oats	0.51	20	40
Peas, common	0.7	20	60
Rapeseed	0.74	20	60
Rice, paddy	0.51	20	45
Rice, white	0.75	14	80
Rye	0.69	20	75
Sorghum	0.64	20	75
Soybeans	0.72	20	60
Wheat	0.76	15-20	75

Note: Capacities may vary for different impurity and moisture contents.

## DIMENSIONS

Wheel size	ø240×496 mm (9 pcs)
Overall length	2 246 mm
Overall height	2 237 mm
Overall width	2 264 mm

## WEIGHT

Weight, empty	1 100 kg
Weight, operating (wheat)	1 310 kg
Weight, choked (wheat)	3 380 kg

## OPERATING SPEED

Motor, wheels	20-100 rpm
---------------	------------