


GRADER DELTA 126

GENERAL

| | |
|-------------|---------------------------------------------------------------------------------------|
| Brand | Cimbria |
| Designation | Flat-screen grader |
| Model | DELTA 126 |
| Use | Industry |
| Application | Size grading of cereal grains, pulses, oilseeds, and similar seeds intended for seed. |

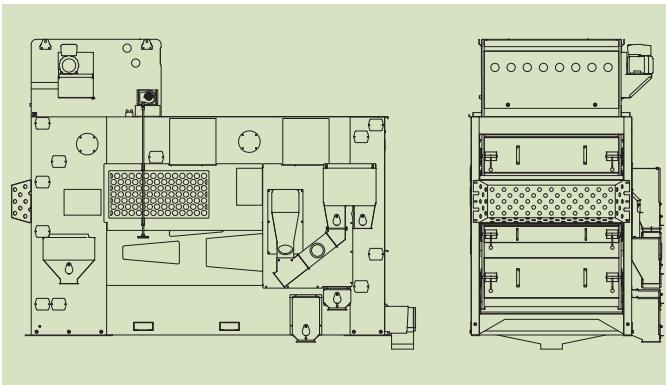

PERFORMANCE

| | Bulk density t/m ³ | Moisture content % | Capacity t/h |
|---------------|----------------------------------|-----------------------|-----------------|
| Barley | 0.68 | 14 | 7 |
| Coffee, green | 0.65 | 14 | 3–6 |
| Maize | 0.71 | 14 | 3–6 |
| Oats | 0.51 | 14 | 5 |
| Peas, common | 0.7 | 14 | 4–6 |
| Rice, white | 0.75 | 14 | 7 |
| Rye | 0.69 | 14 | 5 |
| Ryegrass | 0.3 | 14 | 2.2 |
| Sorghum | 0.64 | 14 | 7 |
| Soybeans | 0.72 | 14 | 4–6 |
| Sunflower | 0.4 | 9 | 1.5–3 |
| Wheat | 0.76 | 14 | 7 |

Note: Capacities are for grading three to four fractions. Capacities may vary for different number of grades.

DIMENSIONS

| | |
|--------------------|----------------------|
| Screen area, total | 15 m ² |
| Screen size | 1 250×800mm (15 pcs) |
| Overall length | 3 750 mm |
| Overall height | 2 751 mm |
| Overall width | 1 790 mm |

WEIGHT

| | |
|---------------------------|----------|
| Weight, empty | 2 150 kg |
| Weight, operating (wheat) | 2 350 kg |
| Weight, choked (wheat) | 5 775 kg |

OPERATING SPEED

| | |
|---------------------------------|-------------|
| Shaker feeder (shaft) | 140–700 rpm |
| Screens (shaft), fixed speed | 280–285 rpm |
| Screens (shaft), variable speed | 260–320 rpm |

ELECTRICAL RATINGS

| | |
|----------------------|---------|
| Motor, shaker feeder | 0.75 kW |
| Motor, screens | 2.2 kW |

AIR SUPPLY AND EXTRACTION

| | |
|-------------------|-------------------------------|
| Aspiration volume | 1 000–2 500 m ³ /h |
|-------------------|-------------------------------|

DYNAMIC LOADS

| | |
|----------------------------------|-----------------------|
| Horizontal load "Ph" | ±1 752 N @ 4.6–4.8 Hz |
| Vertical load "Pv1" (inlet end) | ±1 434 N @ 4.6–4.8 Hz |
| Vertical load "Pv2" (outlet end) | ±1 582 N @ 4.6–4.8 Hz |

Note: Dynamic loads are for normal operation.

NOISE

| | |
|-----------------------------|------------|
| Sound pressure level, empty | 81.6 dB(A) |
| Sound power level, empty | 96.1 dB(A) |

COMPLIANCE

| | |
|-----------------------------|---------|
| EU machinery legislation | Yes |
| EU ATEX legislation | Option* |
| EU food contact legislation | Option* |

* Consult your Cimbria dealer for full details.

ENVIRONMENTAL CONDITIONS

| | |
|-------------|---------------------|
| Environment | Indoors |
| Temperature | From -20°C to +40°C |
| Altitude | Up to 800 m |

SURFACE PROTECTION

| | |
|---------------------|-------------------------------------------------|
| Frame and enclosure | Paint (corrosivity category C2; low durability) |
|---------------------|-------------------------------------------------|

LIFETIME

| | |
|---------------------|----------|
| Intended life limit | 20 years |
|---------------------|----------|